


Tools Needed:


- Phillips screwdriver
- Needlenose pliers




Step 2: Unscrew the 8 screws (circled in red) to open the battery case.

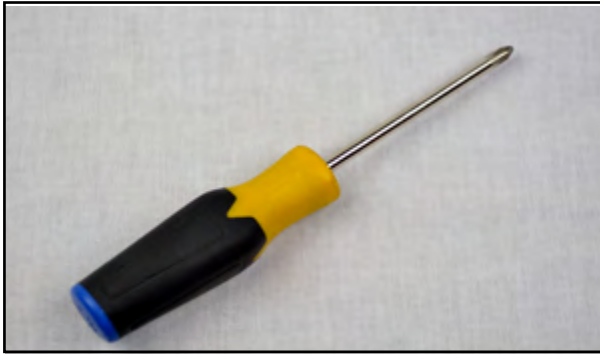


Step 1: Cover the battery connection port, circled in red, with tape before continuing with this procedure.

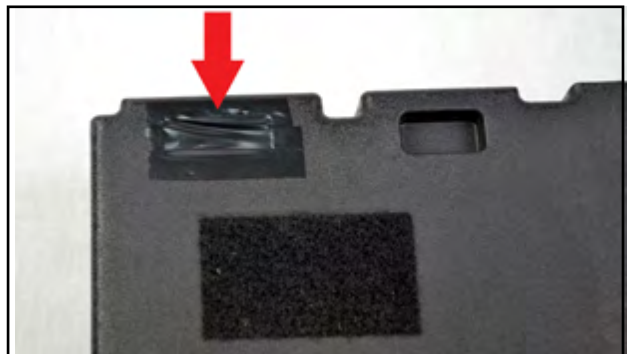

Step 3 (Inside Battery Box): Avoid touching the indicated areas with metal objects. This can short circuit and cause damage to the battery.

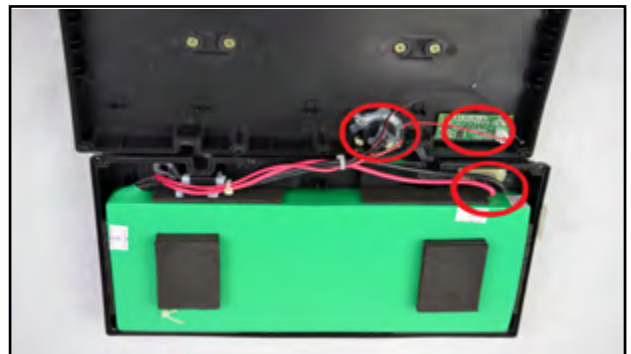

Step 4: Remove the 4 screws circled in red.

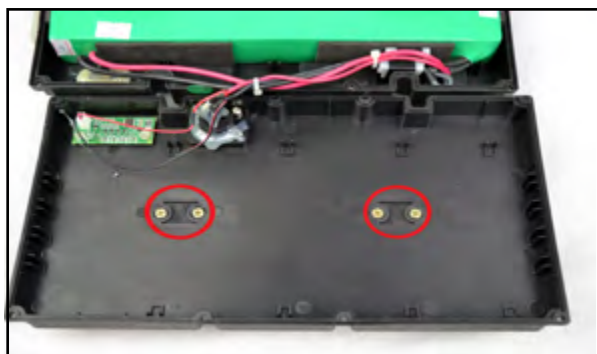

Step 5: Remove the battery handle.



Step 6: Install the replacement battery handle on top of the battery box cover.



Step 7: Align the handle mounting holes and insert the screws to attach the battery handle.



Step 8: Align the screw holes to install the battery cover and install the 8 screws and 8 nuts.



Step 9: Make sure battery is properly sealed and secured tightly. Remove tape from battery connection port.



The End: Congratulations, you have successfully replaced the battery handle!