

VII. APP

Preparation

- Bluetooth Adapter and Cell Phone USB Data Cable.
- Search and download "CaddyTrek" APP.







IOS



Android

Set up Bluetooth pairing with R3X

1. Insert the Bluetooth Adapter into the USB port on the back of R3X.
2. Turn on R3X.
3. Open "CaddyTrek R3X" APP on your phone.
4. Tap "Search CaddyTrek".
5. Select your R3X and enter operational page.

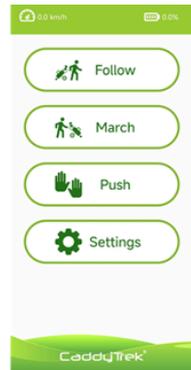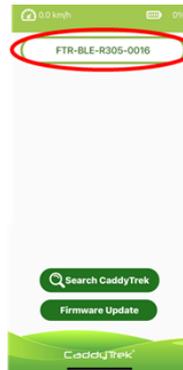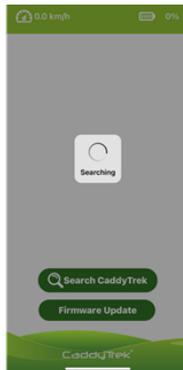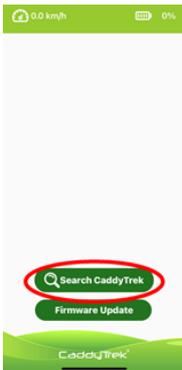


VII. APP

Using APP

- Operation Modes

Tap "Follow", "March" or "Push" to engage operation mode. Tap again to disengage and back to Operational Page.

Note: Switching modes could only be used when R3X is stationary.

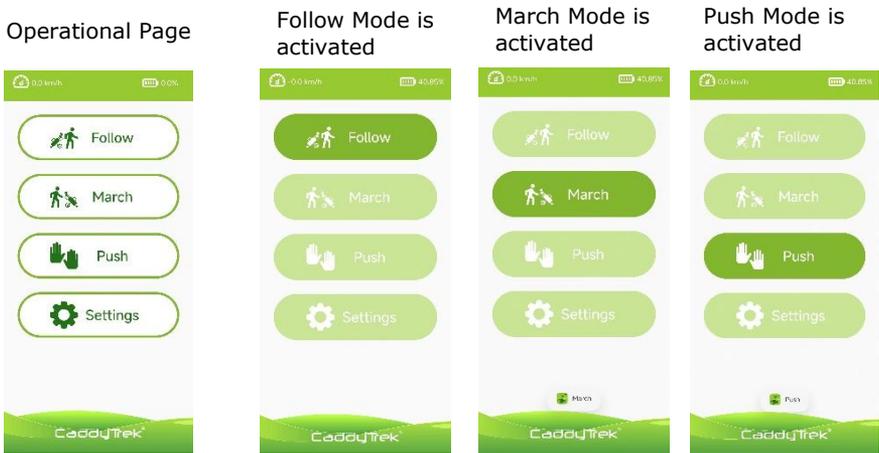

Setting Page

- Name: Name your R3X with seven-digit alphanumeric characters (capital letters and numbers).
- Camera Calibration: Please contact FTR Systems to check whether Camera Calibration is needed.
- Gyroscope Calibration: Tap to calibrate gyroscope. Reboot R3X after hearing calibration completed beeps.



VII. APP

Firmware Update

Please proceed firmware update **only** when receiving notification from manufacturer.




Note:

- Keep the phone power over 30% to avoid interrupting update.
- Firmware update file is about 130MB. Make sure there is enough storage on your phone.


Steps:

1. Connect your phone and R3X using Cell Phone USB Data Cable. USB port is on the back of R3X.
2. Turn on R3X and enable the USB Tethering/hotspot option from within your phone in 30 seconds.
3. On phone's settings page, turn on USB tethering/hotspot.
Android: Settings > Portable Hotspot> Turn on USB tethering

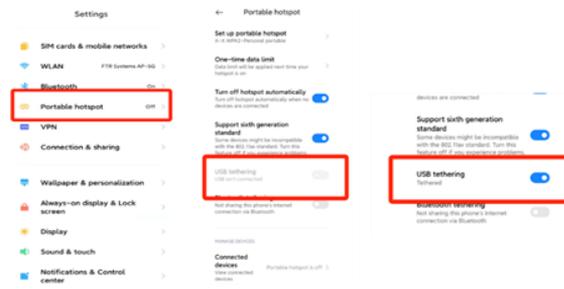

VII. APP

iPhone: Settings > Personal Hotspot > Turn on Allow Others to Join

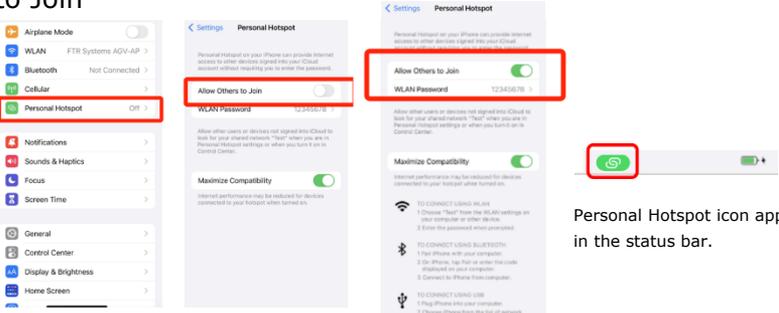

Personal Hotspot icon appears in the status bar.

4. Firmware Download: Download and save the latest firmware update on phone. (The file is about 130MB. Make sure there is enough storage on your phone.)



Note:

- If your R3X is not listed on screen, it is mainly due to the connection of Cell Phone USB Data Cable loose. Please check the ports on each side or use data cable from your phone maker.

VII. APP

Others:




Delete download file: Swipe left to delete.

Client Application: According to manufacturer's instructions, download specific firmware.


5. Firmware Update: Select your R3X and the latest version of firmware. Double check the current and latest version. Tap update to proceed.

Before updating firmware, it may request script update first. Please follow the instruction on app and complete script update.

Do not turn off R3X while it is updating. Reboot R3X after update completed.

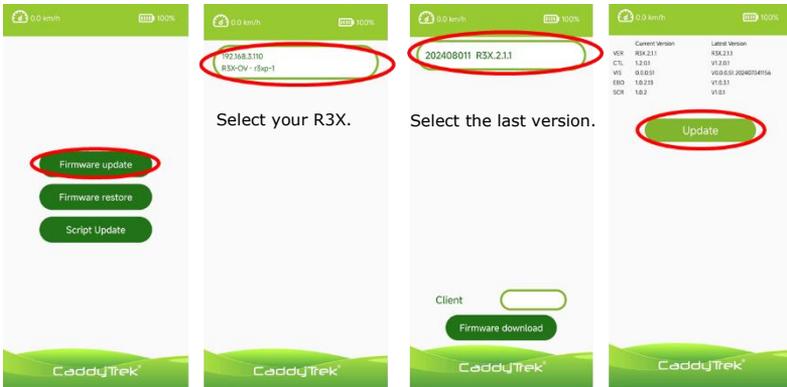

VII. APP

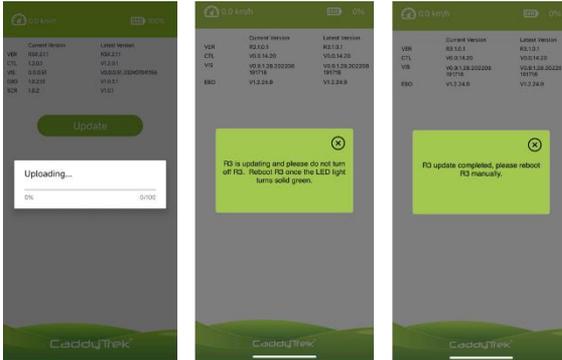

Firmware Restore

Please proceed firmware update **only** when receiving notification from manufacturer.

- Firmware Restore (to the previous version): Select your R3X first. Double check the current and previous version. Tap restore to proceed.

